

B110M

Wax Resin-Flat head

Eco Wax Resin

- Printing quality excellence
- Wide label adaptability
- Excellent abrasion resistance

PRINTING PROPERTIES

	Rough Paper	Coated Paper	Thermal Transfer Paper	Gloss Paper
Compatibility	\varnothing	$ \emptyset $	\varnothing	\odot

RIBBON PROPERTIES

Polyester film

• Total ribbon thickness: 6.9-7.1 µm

• Ink melting point: 85°C

IMAGE PROPERTIES

• Image density: 1.2 or more*

• Resolution : ANSI C or more*

*RICOH standard test method

Application



Tags





rtota



Medica



CERTIFIICATE COMPLIANCES










B110M QUALIFICATION

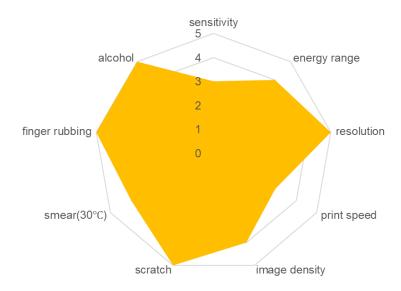

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method) Please check its matching before using

GENERAL CONDITION

Storage conditions: Keep in-door, avoiding high temperature (such as beside heat source), high humidity and direct sun light.

Usage environment: 5-35°C, 30-85% RH

Guarantee period: 1 year after delivery

IMS DIVISION RICOH (THAILAND) LTD

341 Onnuj Road, Prawet, Prawet, Bangkok 10250, Thailand Tel: 02-088-8888

Email: RTHIMS@Ricoh.co.th Website: www.ricoh.co.th



^{*} Specifications are subjected to change without notice.

^{*} The color(s) of the actual product may vary from the color(s) shown in this datasheet