

D110C

High durability

Resin • Flat head • Near edge

- Printing on receiving cloths (nylon, polyester, acetate).
- Superior ironing resistance at temperature up to 150°C.
- The printed image is very resistant to water washing, dry cleaning, stone wash and bleach.
- Higher sensitivity and image density
- Ricoh's unique coating on the back allows reliable and superior matching qualities with the thermal head.

PRINTING PROPERTIES

Maximum printing speed 6 IPS

	Nylon	Polyester satin	Acetate
Compatibility	✓	✓	✓
Image density	1.79	1.57	1.55

Image resolution for paper & film:

Minimum size: - For the lines: 4.0 mm

- For the characters: 1.0mm

RIBBON PROPERTIES

- Total ribbon thickness: < 9 µm
- Polyester film thickness: 4.5 µm
- Friction coefficient: < 0.045
- Ink melting point: 83°C
- Tearing resistance: > 200N/mm²
- Transmission density: 1.40 mini

CERTIFICATES/ DIRECTIVES

TSCA ✓
Toxic Substance
Control Act

ISO EN71-3 ✓
European
Standard EN71

RoHS ✓
Restriction of Hazardous
Substances

2003/11/EC ✓
Directive 2003/11/EC

WEEE ✓
Waste Electrical &
Electronic Equipment

2000/53/EC ✓
Directive 2000/53/EC

REACH ✓
Chemical &
Environment

76/769/EEC ✓
Directive 76/769/EEC

Application



Cloth care label

GENERAL CONDITION

Usage conditions: 5 to 35°C at 30 to 85% of relative humidity.

Storage conditions: Keep indoors avoiding high temperatures (such as beside a heat source), high humidity, and direct sunlight.


Storage life: 24 months after slitting day.

RICOH
imagine. change.

PRINTED IMAGE DURABILITY

TESTS with standard nylon care labels	RESULTS
Standard wash 25 washing at 40°C during 45 min • Test ISO C06A1M	ANSI > B
Standard wash 25 washing at 60°C during 45 min • Test ISO C06A1M	ANSI > B
Stone wash 1 time	ANSI > C
Dry cleaning 5 times	ANSI > B
Direct & indirect ironing (150°C) 20 back and forwards	ANSI > B
Bleaching diluted to 5% during 2h	ANSI > B
Light Xenon lamp at 650W/m ² during 1 month	ANSI > B

D110C DURABILITY

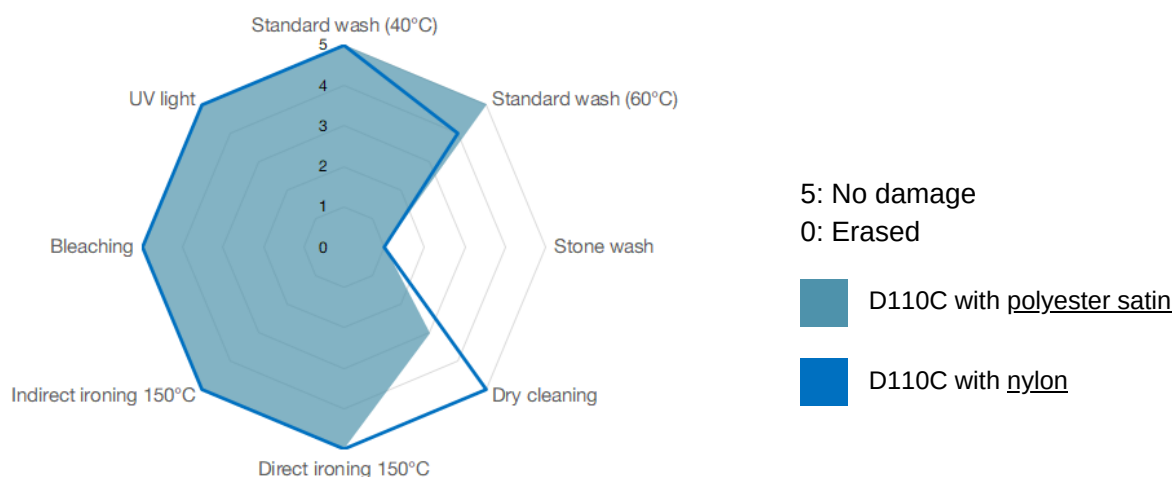

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)

IMS DIVISION

RICOH (THAILAND) LTD

341 Onnuj Road, Prawet, Prawet, Bangkok 10250, Thailand

Tel: 02-088-8888

Email: RTHIMS@Ricoh.co.th Website: www.ricoh.co.th

* Specifications are subjected to change without notice.

* The color(s) of the actual product may vary from the color(s) shown in this datasheet



Scan to visit product's page